

# FRIGIDAIRE

affinity.



## Front Load Washers

FAFS4073N R/A/W

10 Wash Cycles  
3.8 Cu.Ft. D.O.E.



Optional SpaceWise® Pedestal Drawer Shown




### Signature Features




#### Better Stain Removal

"Ready Steam™" option improves stain removal, ensuring cleaner clothes.

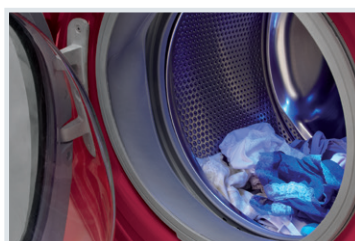

#### Fastest Full Load Wash<sup>1</sup>

Wash a full load the fastest. With Quick Wash, a full load is finished in just 20 minutes.

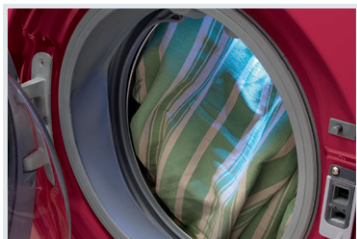

#### Largest Capacity in its Class<sup>2</sup>

Largest capacity lets you do the most laundry in the least amount of time.



#### ENERGY STAR® Most Efficient<sup>3</sup>

Recognized as the Most Efficient of ENERGY STAR® in 2014.

### Product Dimensions

|        |          |
|--------|----------|
| Height | 36"      |
| Width  | 27"      |
| Depth  | 30-5/16" |

### More Easy To Use Features

#### Energy Saver Option

Option further reduces energy use up to 60%.<sup>4</sup>

#### TimeWise® Technology

TimeWise® technology ensures wash time equals dry time — so you don't wait for clothes to dry.

#### NSF® Certified Allergen Cycle

Removes up to 95% of allergens.

#### Stain Pretreat

A 10-minute special soak cycle that removes even the toughest stains.

#### Vibration Control System

Advanced vibration control keeps even oversized loads balanced for smooth, quiet operation. Ideal for second floor installation.

#### Express-Select® Controls

Easily select options and cycles with the touch of a button.

#### Fresh Water Rinse Option

An additional rinse cycle uses advanced rinse technology to effectively reduce detergents and additives.

#### SilentDesign™

Designed for quiet operation.

#### Stay-Fresh™ Door Seal

#### Optional Pedestal Drawer

ENERGY STAR® Most Efficient<sup>3</sup>  
NSF® International Certification



#### Available in:



Classic  
Red  
(R)



Classic  
Silver  
(A)



Classic  
White  
(W)

<sup>1</sup>Based on AHAM standard for 8 lb. load for various load compositions/Quick Cycle selected.

<sup>2</sup>Based on D.O.E. Cu.Ft. capacity for washers 36" or less in height and 27" or less in width.


<sup>3</sup>Recognized as the Most Efficient of ENERGY STAR® in 2014.

<sup>4</sup>Based on a 15.8 lb. load as tested per D.O.E. Protocol 10CFR430, subpart B, App. J, cl.3.1.

| Features                                  |                    |
|---|--------------------|
| Total Capacity D.O.E. (Cu.Ft.)            | 3.8                |
| Controls                                  | Express-Select®    |
| Washer Drum Interior                      | Stainless Steel    |
| Lifetime Warranty Tub                     | Yes                |
| Interior Light/Door Trim                  | No/Chrome          |
| Vibration Control System                  | Yes                |
| Advanced Rinse Technology                 | Yes                |
| TimeWise® Technology                      | Yes                |
| Ready Clean™/Ready Steam™                 | No/Option          |
| Fresh Water Rinse Option                  | Yes                |
| Stay-Fresh™ Door Seal                     | Yes                |
| Automatic Temperature Control             | Yes                |
| Automatic Water Level Adjustments         | Yes                |
| Auto Prewash Detergent Dispenser          |                    |
| Auto Bleach Dispenser                     | Yes                |
| Auto Detergent Dispenser                  | Yes                |
| Auto Fabric Softener Dispenser            | Yes                |
| Time Remaining Indicator                  | Yes                |
| Cycle Status Lights                       | Yes                |
| Cycle Signal/Cycle Signal "On/Off"        | Chime/Yes          |
| Cycle Signal Volume Control               |                    |
| Door Lock Indicator Light                 | Yes                |
| Control Lock/Stay Put Door                | Yes/Yes            |
| Start/Pause/Cancel Buttons                | Yes                |
| Energy Saver Option                       | Yes                |
| Delay Start                               | Up to 16 Hours     |
| Integral Water Heater                     | Yes, 1000 Watts    |
| Tumble Speed (RPM)                        | Variable           |
| Spin Speed (Maximum RPM)                  | 1200               |
| Sound Package                             | SilentDesign™      |
| Adjustable Leveling Legs                  | Yes                |
| Cycles                                    |                    |
| Wash Cycles/Specialty Cycles              | 10/0               |
| Options                                   |                    |
| Water Temperature Selections              | 5                  |
| Water Levels                              | Automatic/Max Fill |
| Spin Speed/Soil Level Selections          | 5/5                |
| Allergen                                  |                    |
| Optional Accessories                      |                    |
| Dryer Stacking Kit                        | PN # STACKIT4X     |
| 15" Frigidaire Affinity® Pedestal Drawers |                    |
| Classic Red (R)                           | PN # CFPWD15R      |
| Classic Silver (A)                        | PN # CFPWD15A      |
| Classic White (W)                         | PN # CFPWD15W      |
| Mobile Home Installation Kit              | PN # 137067200     |
| Drain Hose Extension Kit                  | PN # 137098000     |
| Certifications                            |                    |
| ENERGY STAR® Most Efficient¹              | Yes                |
| NSF® Certified Sanitize/Allergen          | Yes/Yes            |
| Specifications                            |                    |
| Power Supply Connection Location          | Right Top Rear     |
| Water Inlet Connection Location           | Left Top Rear      |
| Voltage Rating                            | 120V/60Hz/15A      |
| Connected Load (kW Rating) @ 120 Volts²   | 1.1                |
| Watts @ 120 Volts/Amps @ 120 Volts        | 1,000/10           |
| Minimum Circuit Required (Amps)           | 15                 |
| Shipping Weight (Approx.)                 | 222 Lbs.           |

¹Recognized as the Most Efficient of ENERGY STAR® in 2014.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.


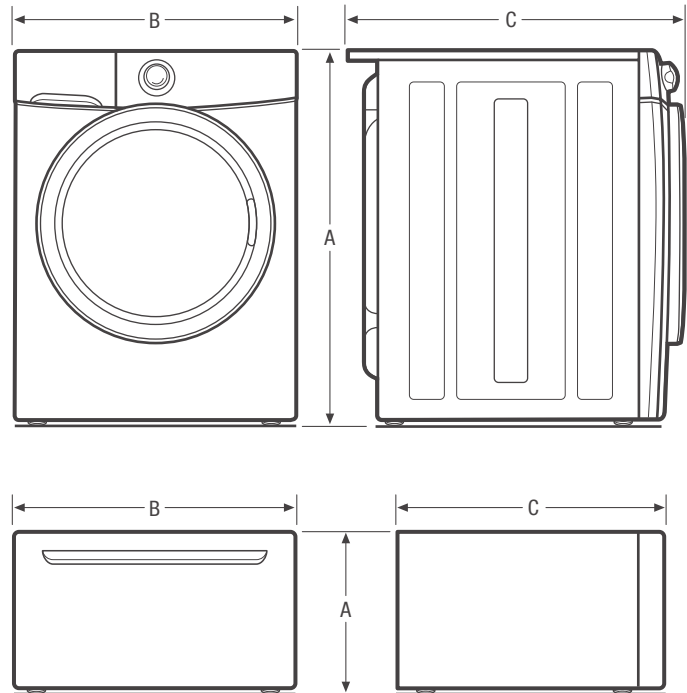


NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



| Product Dimensions               |          |
|----------------------------------|----------|
| A - Height (Single)              | 36"      |
| Height (Stacked)                 | 71-1/2"  |
| B - Width                        | 27"      |
| C - Depth                        | 30-5/16" |
| Depth with Door Open 90°         | 51-7/16" |
| Pedestal Dimensions              |          |
| A - Height                       | 15-1/4"  |
| B - Width                        | 27"      |
| C - Depth                        | 26-1/2"  |
| Depth with Drawer Fully Extended | 42-1/2"  |

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

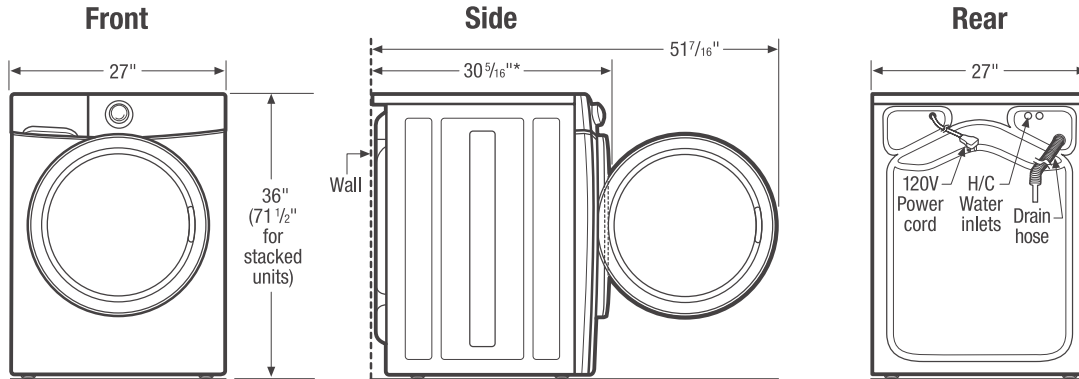


### 15" Pedestal Drawer Installation

Elevates washer height to 51 1/4". For detailed pedestal installation, refer to instructions included with pedestal or on web.

**Note:** Pedestal Installation requires modified utility hookup locations. For details, refer to Product Installation Guide on web.

### Built-In Installations


For built-in washer/non-steam dryer installations, NO minimum clearance required around sides or backs of units (see built-in illustrations). For washer installation with steam dryer, additional 3/4" steam hose clearance required at back of dryer. For closet installation, allow additional 1" clearance between fronts of units and door. Location of plumbing, exhaust and utility hookups MUST be considered in built-in installations. For additional installation details, refer to Product Installation Guides on web.

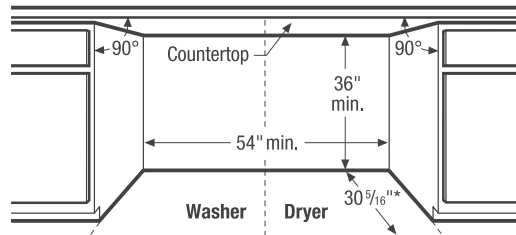

### Side-by-Side Units in Under-Counter Installation

Can be installed with standard countertop and/or cabinetry.

\* To achieve minimal installation depth dimensions, dryer MUST be vented straight back. For installation with quick-turn 90° elbow, refer to Product Installation Guide on web for approximate clearances incurred with multi-directional exhausting options in freestanding, pedestal-mounted, or stacked installation.

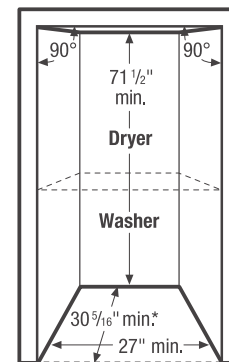

### Stacked Units in Recessed or Closet Installation

For detailed stacked installation, refer to instructions included with Stacking Kit or on web. **Note:** Stacked installation requires modified utility hookup locations for dryer. For details, refer to Product Installation Guide on web.

### Front Load Washer Specifications

- Product Shipping Weight (approx.) - 222 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (Do not use same circuit as dryer.)
- Voltage Rating - 120V/60 Hz/15 Amps
- Amps @ 120 Volts = 10 Amps
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric & plumbing codes.
- To maximize detergent effectiveness, ambient temperature should never be below 60° F.
- Can be installed alone, with or without optional 15" Pedestal Drawer, or stacked below matching Frigidaire® Affinity Dryer, which requires installation of optional Dryer Stacking Kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)
- Can be built in with matching Frigidaire® Affinity Dryer in under-counter, recessed or closet installation. (Refer to Built-In Installations on this page for cutout dimensions. For additional installation details, refer to Product Installation Guide on web.)
- Closet installation requires vented door with 2 unobstructed louvered openings, minimum 60 sq. in. each, located 3" from top and bottom of door. Full-length 120 sq. in. opening also acceptable. Allow additional 1" clearance between fronts of units and closed door.
- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.

- Floor MUST be solid with 1" maximum slope. To minimize vibration or movement, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level washer properly and reduce excessive noise and vibration.
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" to connect to 43" inlet hoses.
- Water pressure MUST be between 30 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain required with standpipe diameter of 1-1/4" min. and height of 24" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 74"-high standpipe. For higher standpipe, optional Drain Hose Extension Kit available.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

### Optional Accessories

- Dryer Stacking Kit - (PN# STACKIT4X).
- 15" Classic Red Pedestal Drawer - (PN# CFPWD15R).
- 15" Classic Silver Pedestal Drawer - (PN# CFPWD15A).
- 15" Classic White Pedestal Drawer - (PN# CFPWD15W).
- Mobile Home Installation Kit - (PN# 137067200).
- Drain Hose Extension Kit - (PN# 137098000).